



ADROCK

Color Body Glazed Porcelain Tile


Portobello
America

Adrock Collection

Adrock was idealized with the ambition of translating the thought of “less is more” into a design proposal that, from a fusion of materials such as limestone, cement and basalt, creates a striking but alluring matte surface.

The veins and elements of natural stones in this chromatic balance converges to something unique: A contemporary view of the layers of time.



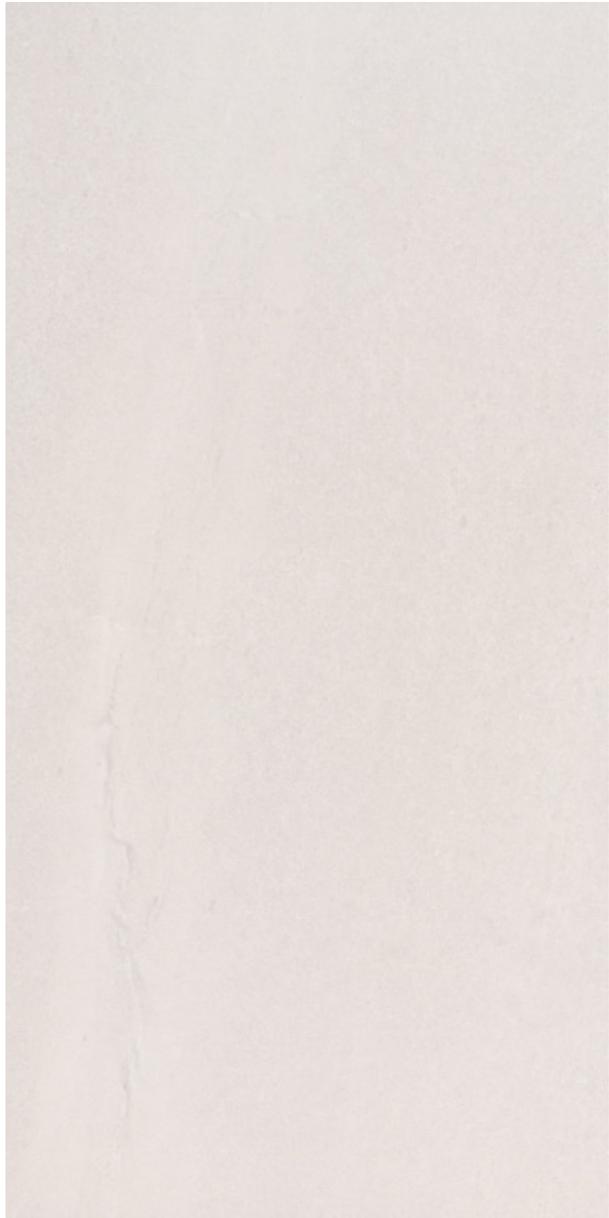

Adrock Frost



Adrock **Latte**








Adrock **Espresso**






Available sizes


SMALL FORMATS / WALL TILE

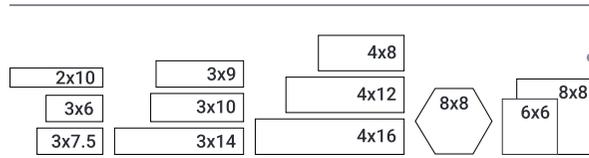


SPECIAL PIECES

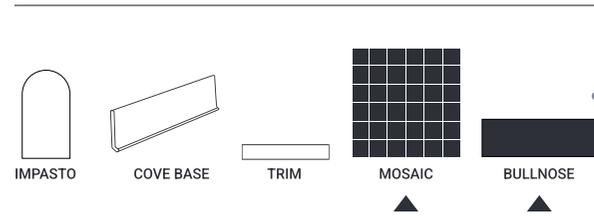


LARGE FORMAT

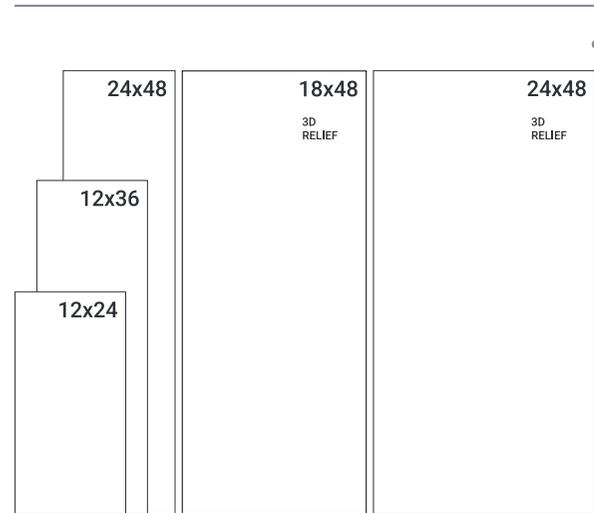

PORCELAIN PLANKS

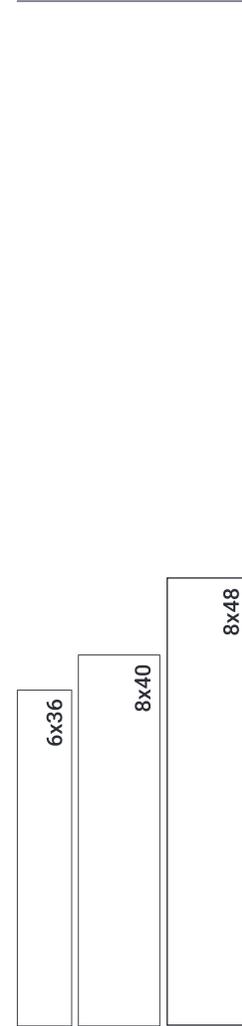

PORCELAIN TILE

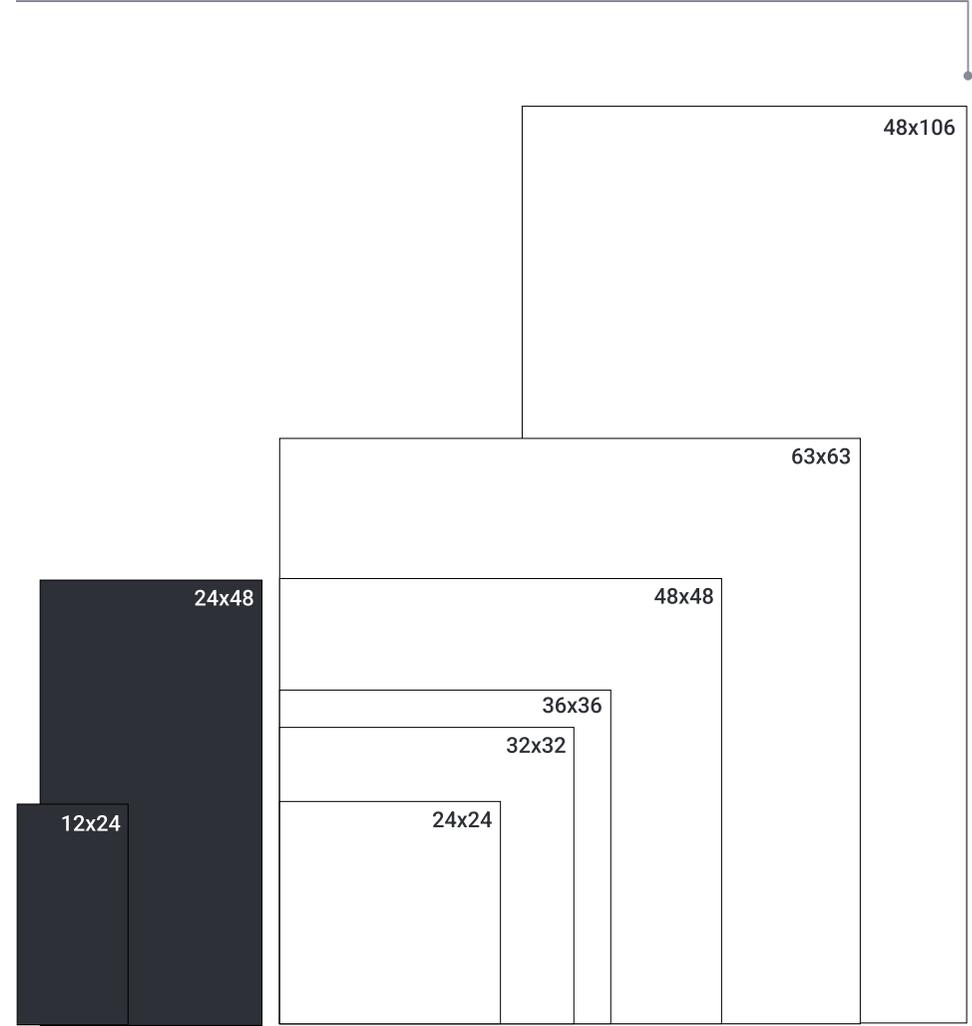

Available finishes



Available Edges



Adrock

Color Body Glazed Porcelain Tile

Frost | V3



24X48 NAT RECT | #900163E
12x24 NAT PRESSED | #900047E

Single Bullnose
3x12 NAT RECT | #79158ET

Latte | V3



12x24 NAT PRESSED | #900048E

Single Bullnose
3x12 NAT RECT | #79157ET

Nickel | V3



24X48 NAT RECT | #900165E
12x24 NAT PRESSED | #900049E

Single Bullnose
3x12 NAT RECT | #79159ET

Espresso | V3



12x24 NAT PRESSED | #900050E

Single Bullnose
3x12 NAT RECT | #79156ET


Shadow | V3



12x24 NAT PRESSED | #900051E

Single Bullnose
3x12 NAT RECT | #79160ET

Mos SQ 2x2 Frost | V3




12x12 NAT | #79088ET

Mos SQ 2x2 Latte | V3




12x12 NAT | #79087ET

Mos SQ 2x2 Nickel | V3




12x12 NAT | #79089ET

Mos SQ 2x2 Espresso | V3



12x12 NAT | #79086ET

Mos SQ 2x2 Shadow | V3



12x12 NAT | #79090ET

Mos Interlocking 2x6 Frost | V3




12x14 NAT | #79093ET

Mos Interlocking 2x6 Latte | V3



12x14 NAT | #79092ET

Mos Interlocking 2x6 Nickel | V3



12x14 NAT | #79094ET

Mos Interlocking 2x6 Espresso | V3



12x14 NAT | #79091ET

Mos Interlocking 2x6 Shadow | V3



12x14 NAT | #79095ET



Tech Data

Finish	Freeze Resistant	Shade Variation	Color Body	Water Absorption	Stain Resistant	DCOF AcuTest	Chemical Resistant	Breaking Strength	Mohs Hardness
NAT	Resistant	V3	√	≤0.5%	Class A	≥0.60	Class A	≥275lbf	7

Areas of Usage

Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√
Interior, Wet Plus	IW+	√ 2x2 2x6
Exterior, Wet	EW	
Oils/Greases	O/G	

Formats



24X48



12x24



12x12



12x14

Grout Joint

The recommended grout joint:

1/8 RECT

3/16 PRESSED



06x12 COVE BASE



03x12 BULLNOSE



Portobello
America